



MFSQ-150/1500W 模块化单模准连续光纤激光器

使用手册

版权说明

“ ”

引 语

MFSQ

MFSQ

公司简介

2004

<http://www.maxphotonics.com>



:
: <http://www.maxphotonics.com>
: 400-900-9588
: +86-755-36869377
: info@maxphotonics.com

| | |
|-----------------------|-----------|
| | 1 |
| 第一章 特性说明 | 4 |
| 第二章 安全信息 | 5 |
| 1- | 5 |
| 2- | 6 |
| 3- | 6 |
| 4- | 10 |
| 第三章 产品描述 | 11 |
| 1- | 11 |
| 2- | 11 |
| 3- | 11 |
| 第四章 详细规格 | 12 |
| 1- | 12 |
| 2- | 13 |
| 3- | 14 |
| 第五章 使用指南 | 15 |
| 1-DB25 | 15 |
| 2- | 16 |
| 3- | 16 |

| | | |
|------------------|--------------|-----------|
| 4- | | 16 |
| 5- | | 17 |
| 6- | | 22 |
| 第六章 服务与维修 | | 23 |
| 1- | | 23 |
| 2- | | 23 |
| 第七章 保修声明 | | 24 |
| 1- | | 24 |
| 2- | | 24 |

第一章 特性说明

MFSQ




1080nm

MFSQ

Class 4

第二章 安全信息

1 -

|  | |
|---|--|
|  | |
|  | |
| | |

Class

1080nm

2 -

1.

2.

LaserVision USA Kentek Corporation Rochwell Laser Industries

3 -

1.

2.

3.

1

2

3

4

5

6

7

4.

| | DC+ |
|--|-----|
| | DC- |

5.

1

2

3



10

5cm

6.

- 1
- 2
- 3
- 4
- 5
- 6

7.

|  | | |
|---|--|--|
|  | | |

4-

Laser Institute of America(LIA)
13501 Ingenuity Drive, Suite 128
Orlando,Florida 32826
Phone:407 380 1553,Fax: 407 380 5588
Toll Free:1 800 34 LASER

American National Standards Institute
ANSI Z136.1, American National Standard for the Safe Use of Lasers
(Available through LIA)

International Electro-technical Commission
IEC 60825-1, Edition 1.2

Center for Devices and Radiological Health
21 CFR 1040.10 - Performance Standards for Light-Emitting Products

US Department of Labor - OSHA
Publication 8-1.7 - Guidelines for Laser Safety and Hazard Assessment.
Laser Safety Equipment

Laurin Publishing
Laser safety equipment and Buyer' s Guides

第三章 产品描述

1-

MFSQ

1

2

3

4

5

1

2

2-

| | |
|----------------|-----------|
| | |
| MFSQ-150/1500W | 150/1500W |

3-

第四章 详细规格

1-

| | | | | | | |
|----|-----|----------|------|-----------|------|---------|
| 1 | | | | 1500 | | W |
| 2 | | | | 150 | | W |
| 3 | | | | 250 | | W |
| 4 | | | | 15 | | J |
| 5 | | | 10 | | 100 | % |
| 6 | | | 1 | | 5000 | Hz |
| 7 | | | 0.05 | | 50 | Ms |
| 8 | | | 0 | | 50 | % |
| 9 | | 100% | 1070 | 1080 | 1090 | nm |
| 10 | | 10~100% | | 65 | | % |
| 11 | | 10~100% | | 27 | | % |
| 12 | 3dB | 100% | | 3 | | nm |
| 13 | | 100% >1h | | 2 | | % |
| 14 | M2 | 100% | | 1.3(20um) | | |
| 15 | | 10% 90% | | 50 | 100 | μ s |
| 16 | | 90% 10% | | 50 | 100 | μ s |
| 17 | | 100% | 100 | | | μ W |
| 18 | | | | 10 | | m |
| 19 | | | 200 | | | mm |
| 20 | | | | 20,50 | | μ m |
| 21 | | | | QBH LOC | | |

2-

| | | | | | | |
|---|--|---------------------------|-----|----|----|-----|
| 1 | | | | 62 | | VDC |
| 2 | | 100% | | 3 | | KW |
| 3 | | | 10 | | 40 | |
| 4 | | | 10 | | 85 | % |
| 5 | | | | | | |
| 6 | | | -10 | | 60 | |
| 7 | | 540*357*130.5mm D x W x H | | | | mm |
| 8 | | 24 | | | | kg |

第五章 使用指南

| | |
|--|---|
| | |
| | 1 |

1-DB25

| 1 | | D_COM | D_COM | |
|----|-------------|----------|-------|---------|
| 2 | | D_INPUT | 24V | = = |
| 3 | | D_INPUT | 24V | = / = |
| 4 | ERROR | D_OUTPUT | 5V | = = () |
| 5 | ERR_RESET | D_INPUT | 24V | 1= |
| 11 | LASER_EN | D_INPUT | 24V | |
| 20 | Ready_Out | D_OUTPUT | 5V | = = / |
| 21 | LASER_ON+ | | 24V | |
| 22 | LASER_ON- | | | |
| 23 | DA(0-10V) + | A_INPUT | 0-10V | |
| 25 | DA(0-10V) - | A_COM | A_COM | |

2-


1

2"

"

24V

3

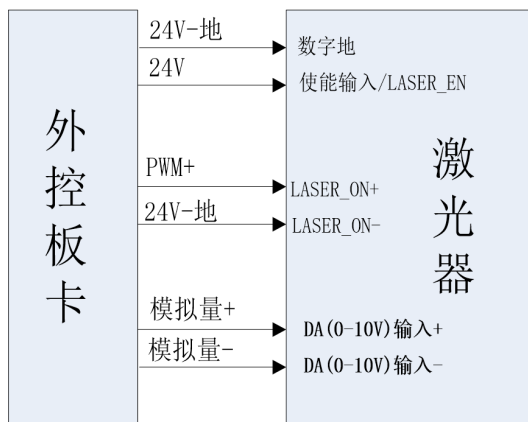

3-


| | | |
|--------|--|--|
| ACTIVE | | |
| ALARM | | |
| POWER | | |

4-


1.

USB

USB




COM " "




5-

1.

ms

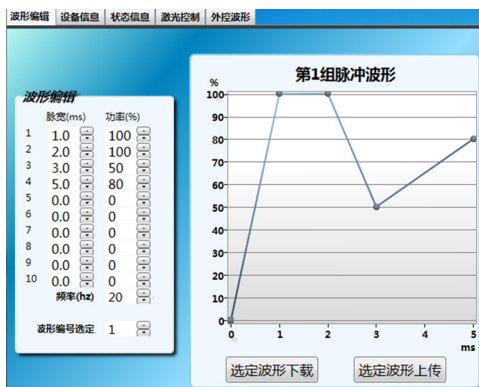

2.

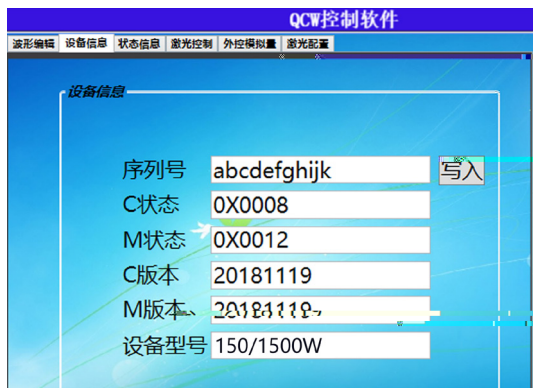

3.



1 PD PD

1

2

2

3 M

4

DB25

LASER_EN

5

6

5.


"/ "

1
" " "
/ "
16 " "

2
" " /
" "

3
" " DB25 21 22 laser_

on




ON

LASER_ON
0.1ms

LASER_

4
 " " DB25 21 22 laser_
 on

5
 " " DB25 21 22
 laser_on DB25 23 25
 10V

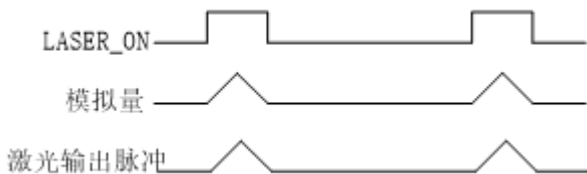

LASER_ON

6
 on DB25 23 25 DB25 21 22 laser_
 10V

6.

" "



7.

波形参数

第1组波形

最大频率: 5000(hz)

占空比: 0%

脉冲能量: 0 焦

平均功率: 0 瓦

当前频率: 90(hz)

机器温度: 25度

6-

$$1 \quad (\text{ms}) = \quad (15\text{J}) * 1000 / \quad (\text{W})$$

| | | | | | |
|-------|---------|-------|---------|------|---------|
| 1500W | 10.00ms | 1000W | 15.00ms | 500W | 30.00ms |
|-------|---------|-------|---------|------|---------|

$$2 \quad (\text{Hz}) = \quad (150\text{W}) / \quad (\text{J})$$

| | | | | | |
|-----|---------|-----|---------|----|---------|
| 15J | 10.00Hz | 10J | 15.00Hz | 5J | 30.00Hz |
|-----|---------|-----|---------|----|---------|

第六章 服务与维修

1-

2-

400-900-9588

第七章 保修声明

1-

2-

- 1
- 2
- 3
- 4
- 5
- 6